
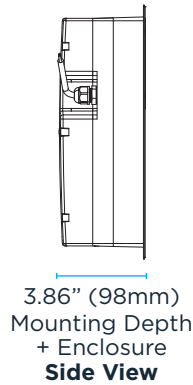


James

BY SONANCE

VISUAL EXPERIENCE with QUADRATECH DATA SHEET

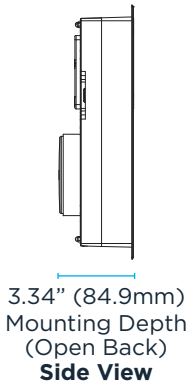

VXQ68 TECHNICAL SPECIFICATIONS

SKU	VXQ68 66049 - Each
Tweeter	0.75" (19mm) four titanium domes, Ferrofluid-cooled, acoustic back chamber
Woofers	6.5" (165mm) Aluminum cone, Santoprene surround
Dispersion Technology	Quadrature Tweeter with Cymatic Diffuser
Frequency Response	40Hz - 20kHz +/-3dB
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 150 watts maximum
Sensitivity (2.83V/1m)	90dB SPL
Mounting Technology	1-stage, 4 x RotoLock® Clamps
Micro Trim Grille (WxH)	8.24" x 12.13" (209.4mm x 308.2mm)
Trimless Grille (WxH)	7.88" x 11.77" (200.1mm x 298.9mm)
Speaker Mounting Depth (D)	3.34" (84.9mm)
Mounting Depth + Encl.	3.86" (98mm)
Cut-Out Dims (WxH)	6.9375" x 10.75" (176mm x 273mm)
Shipping Weight	10 lbs. (4.5kg)

VXQ 6" RECTANGLE ACCESSORIES

VXQ6-GRILLE-T
6" XPC Micro Trim Rectangle Grille / Each 60483

VXQ6-GRILLE-NT
6" XPC Trimless Rectangle Grille / Each 60484

VXQ6-SE
6" Rectangle Shallow Enclosure / Each 60473

FLEXBRK-6
6" Rectangle Flex Bracket / 5x Pair

LIMITED FIVE (5) YEAR WARRANTY Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2024 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

JAMES by SONANCE • 2185 Park Place • Minden, NV 89423 • USA • PHONE: (775) 461-7500 • www.jamesloudspeaker.com

11.28.2023